



ARAGOON

SAFETY PRODUCTS



Disposable Cover all

ROMEO-65

**PREMIUM OIL, LIQUID SPLASH & INFECTIVE AGENTS RESISTANT
PROTECTIVE CLOTHING, Polypropylene + polyethylene film, 65 g/m2**

Designed to protect wearers against heavy liquid splash and biological hazards. The most popular and widely applied choice in various industries.

FEATURES

- » An effective barrier against blood, body body-fluid and infective agents.
- » Premium performance on chemical liquid
- » Penetration resistance and repellency (EN 6530).
- » Proven protection against pesticides.
- » Breathable to work efficiently.
- » Low linting.
- » Targeted for ISO Class 6 and above cleanroom environment with controlled variables.
- » Finger loop for better fit.

SUITABLE FOR

Applications

- » Agriculture.
- » Automotive.
- » Biological Hazards.
- » Disaster Management.
- » Disease Control.
- » Electronics Industries.
- » PharmaceuticalPharmaceutical.
- » Petrochemical.



Breathability



Liquid Protection



Dry Particulate Protection





ARAGOON

SAFETY PRODUCTS



Disposable Cover all

ROMEO-65

CERTIFICATIONS



TYPE 5-B



TYPE 6-B



EN 1073-2



EN 1149-5



EN 14126

| FABRIC PHYSICAL PROPERTIES | | TEST METHOD | | CLASS |
|---------------------------------|-----------|----------------|------------------|------------------------------|
| Abrasion Resistance | | EN 530 | | 1 |
| Flex Cracking Resistance | | EN ISO 7854/B | | 5 |
| Trapezoidal Tear Resistance | | EN ISO 9073-4 | | 1 |
| Tensile Strength | | EN ISO 13934-1 | | 1 |
| Puncture Resistance | | EN 863 | | 1 |
| Seam Strength | | EN ISO 13935-2 | | 3 |
| Antistaticity | | EN 1149-5 | | Pass |
| pH Value | | EN ISO 3071 | | Pass |
| Resistance to Ignition | | EN 13274-4 | | Pass |
| Resistance to Water Penetration | | EN 20811 | | > 2500 mm |
| Water Vapour Resistance [Ret] | | EN ISO 11092 | | 31.7 m ² *Pa/W |
| Against Infective Agents | | EN ISO 14126 | | Pass |
| ISO 16603 | ISO 16604 | ISO 22610 | ISO/DIS 22611 | ISO 22612 |
| 6 | 2 | 6 | 3 | 3 |



ARAGOON

SAFETY PRODUCTS



Disposable Cover all

ROMEO-65

| WHOLE SUIT TEST PERFORMANCE | | RESULT |
|-----------------------------|-----------------------------------|---------|
| Type 5 EN 13982-2 | Inward Leakage Test | Pass |
| Type 6 EN ISO 17491-4/A | Low Level Spray Test | Pass |
| EN 1073-2 | Against Radioactive Contamination | Class 1 |
| | | |

| FABRIC CHEMICAL PROPERTIES BY EN ISO 6530 | | |
|---|-------------|------------|
| | PENETRATION | REPELLENCY |
| Sulphuric Acid 30 % | 3 | 3 |
| Sodium Hydroxide 10 % | 3 | 3 |
| o-Xylene | 2 | 1 |
| Butan-1-ol | 3 | 2 |
| Isopropanol* | 0.00 % | 92.40 % |

*Certified according to Regulation (EU) 2016/425

Note* Isopropanol test is not requested under EN 14325, therefore there is no classification.





ARAGOON

SAFETY PRODUCTS




Disposable Cover all

ROMEO-65


FABRIC AND SEAM

4-thread overlocked seam



- » 7-9 stitched per inch.
- » Thread fibre is 150D.
- » Bite depth 4 mm.

Microporous film laminate PPSB

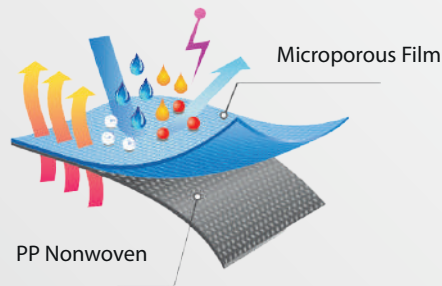

CERTIFICATION LEGENDS



TYPE 5-B

TYPE 5
Suits can protect against hazardous dusts and any dry particles



EN 1149-5

EN 1149-5
Electrostatic dissipative protective clothing



EN 1073-2

EN 1073-2
Protecting against particulate radioactive contamination



TYPE 6-B

TYPE 6
Suits can protect against the light spray and splashes of liquid chemicals



EN 14126

EN 14126
Protection against biological hazards and infective agents

ABOUT ARAGOON



AUSTRALIA - SYDNEY



www.aragoon.com.au



info@aragoon.com.au



UAE - DUBAI



www.aragoon.com.au



admin@aragoon.com.au



ARAGOON®

© 2019 Aragoon Ltd